
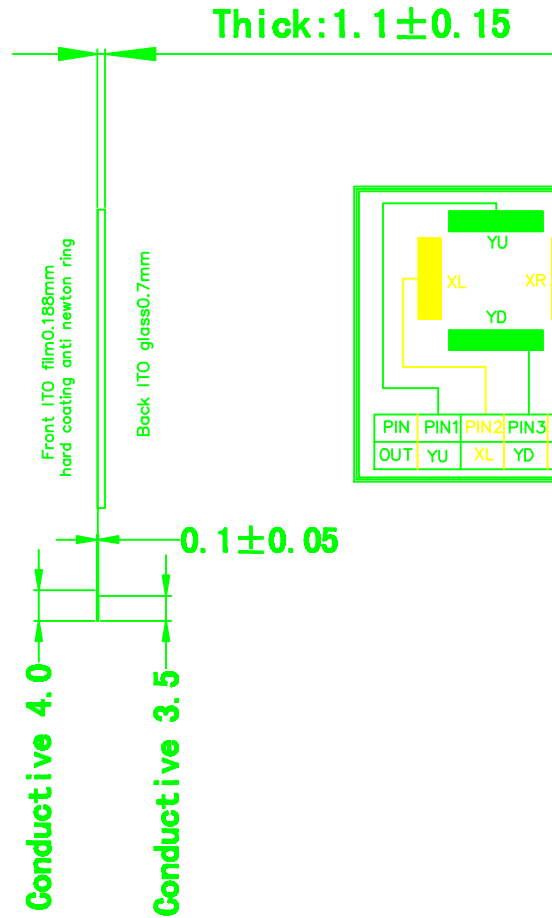


由 Autodesk 教育版产品制作

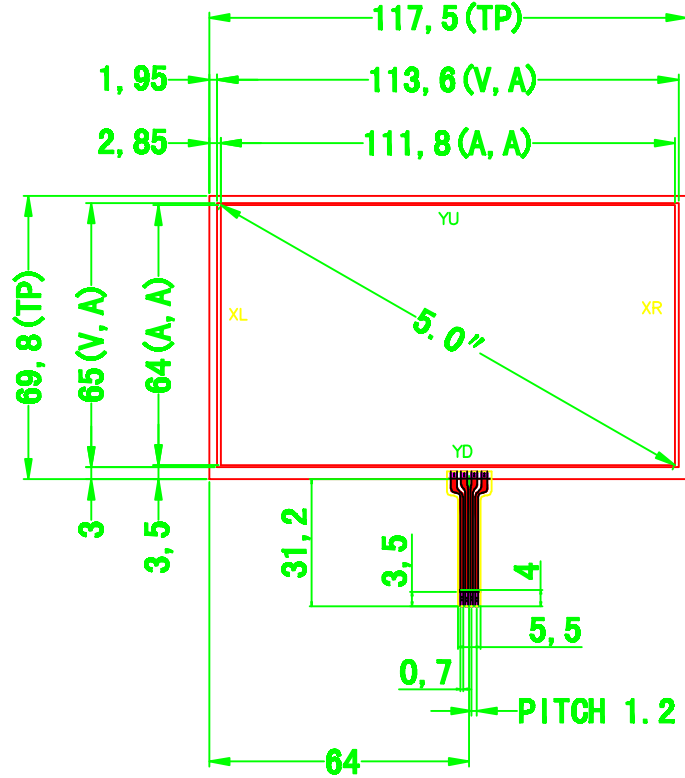

Instruction:

- 1.Type: Film to Glass
- 2.Operating Voltage:  $\leq 10V$
- 3.Response Time:  $\leq 10ms$
- 4.Storage Temperature:  $-20^{\circ}C \sim +70^{\circ}C$
- 5.Operation Temperature/Humidity:  $-10^{\circ}C \sim +60^{\circ}C / 20\% \sim 95\%$
- 6.Hitting Life:  $> 1,000,000$  Times, 250gf Force;
- 7.writing Life  $> 100,000$  Times 250gf Force;
- 8.Connect Material: FPC

- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 0.7mm
- 11.Light transmission:  $\geq 75\%$
- 12.Force: 100g or more
- 13.Linearity:  $\leq 1.5\%$
- 14.Insulation:  $\geq 20M \Omega$
- 15.Resistance: X:  $500 \Omega \sim 1000 \Omega$ ;  
Y:  $180 \Omega \sim 330 \Omega$ ;
- 16.Surface Hardness  $\geq 3H$ (pencil)

Touch-Pane-VTW4051A1

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	A0
UNIT	mm	TOLERANCE	$\pm 0.3m$	NO.	1 of 1
DESIGN	Lucy	DATE	20090901	深圳市伟拓光技术有限公司 Victor-touch Technology Co., LTD. 0755-2322222 0755-2322222 www.victor-touch.com	
CHECK	Peter • LI	DATE	20090901		
RELEASE	Victor	DATE	20090901		