



Version	MARK	MODIFY	DATE

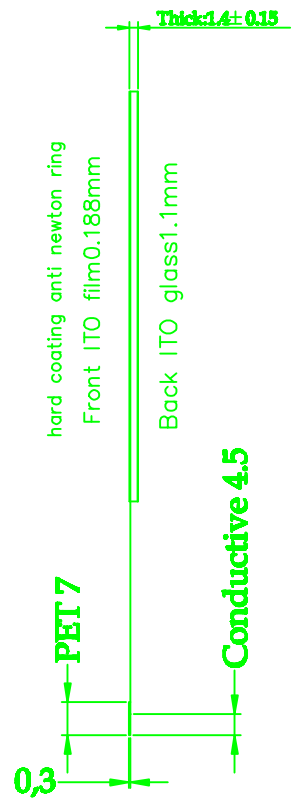

更改为  
VTW4061A2FPC的  
长度和补强板改动

- Instruction:
- 1.Type: Film to Glass
  - 2.Operating Voltage: ≤10V
  - 3.Response Time: ≤10ms
  - 4.Storage Temperature: -20℃~+70℃
  - 5.Operation Temperature/Humidity: -10℃~+60℃/ 20%~95%
  - 6.Hitting Life: >1,000,000 Times ,250gf Force;
  - 7.writing Life>100,000 Times250gf Force;
  - 8.Connect Material:FPC

- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 1.1mm
- 11.Light transmission: ≥78%
- 12.Force: 100g or more
- 13.Linearity: ≤1.5%
- 14.Insulation: ≥20MΩ
- 15.Resistance: Y: 150Ω~380Ω  
X: 510Ω~1100Ω
- 16.Surface Hardness ≥3H(pencil)

Touch-Pane-VTW4061A1						
REVISIONS						
SCALE	1:1	MATERIAL	F/G	Version	2.0	
UNIT	mm	TOLERANCE	±0.3mm	NO:	1 of 1	
DESIGN	Lucy	DATE	20090727	深圳市纬拓技术有限公司 Victor-touch Technology Co.,LTD.		
CHECK	Peter Li	DATE	20090727			
RELEASE	Victor	DATE	20090727			