
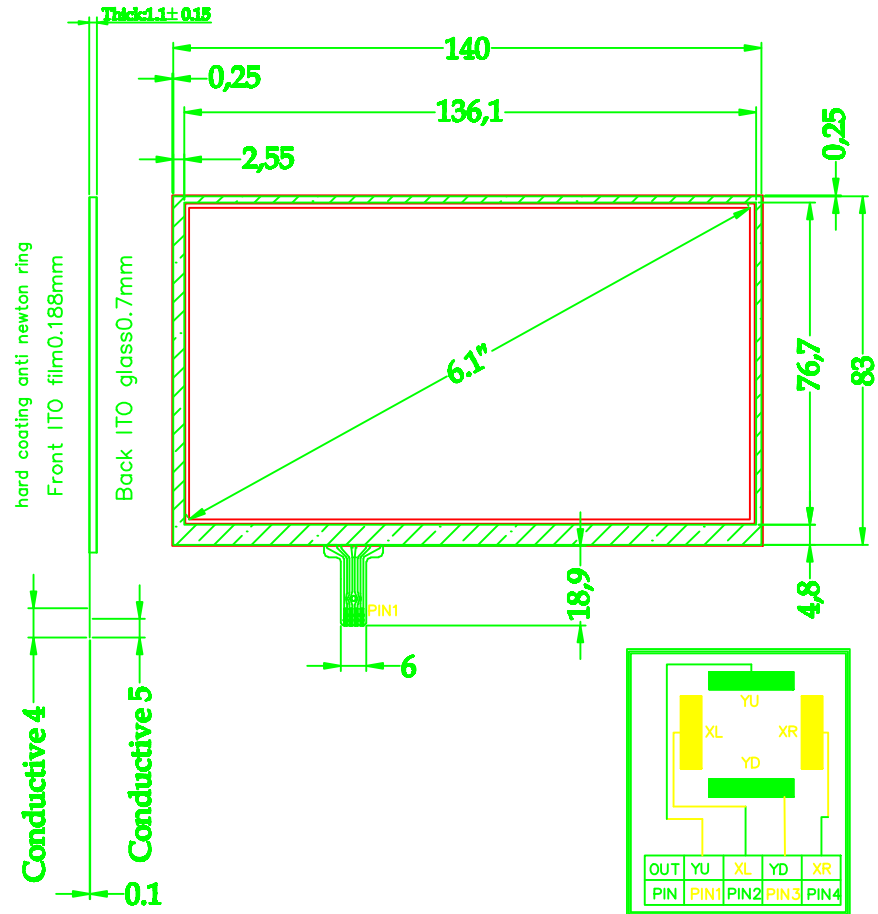


Version	MARK	MODIFY	DATE
2.0	A	FPC-Size	20100409

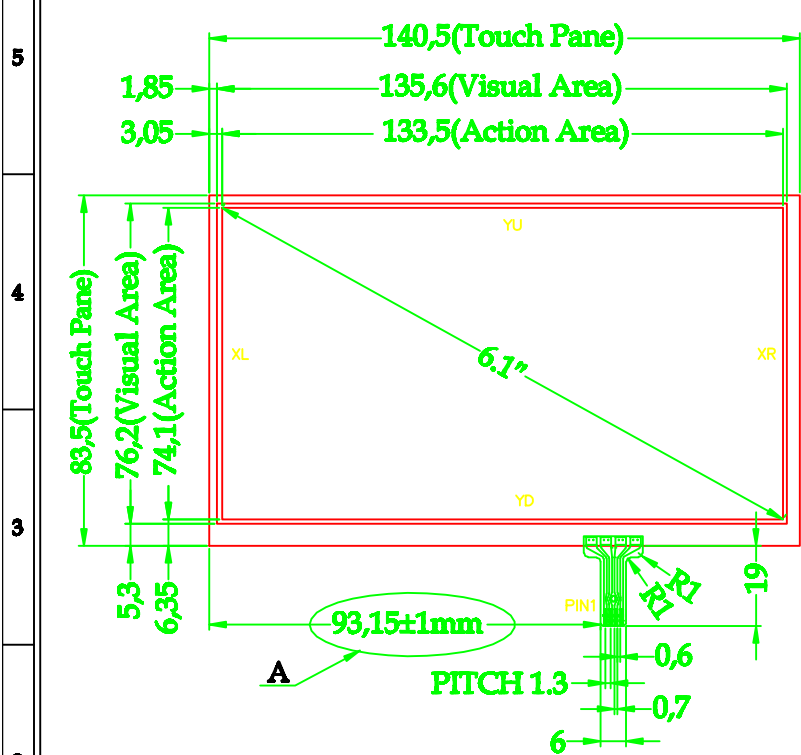

Instruction:  
1.Type: Film to Glass  
2.Operating Voltage: ≤10V  
3.Response Time: ≤10ms  
4.Storage Temperature: -20℃~+70℃  
5.Operation Temperature/Humidity: -10℃~+60℃/ 20%~95%  
6.Hitting Life: >1,000,000 Times, 250gf Force;  
7.writing Life>100,000 Times 250gf Force;  
8.Connect Material: FPC

9.Film Thickness: 0.188mm  
10.Glass Thickness: 0.7mm  
11.Light transmission: ≥78%  
12.Force: 100g or more  
13.Linearity: ≤1.5%  
14.Insulation: ≥20MΩ  
15.Resistance: Y: 150Ω~380Ω  
X: 510Ω~1100Ω  
16.Surface Hardness: ≥3H(pencil)

### Touch-Pane-VTW4061A4

REVISIONS			
SCALE	1:1	MATERIAL	F/G
UNIT	mm	TOLERANCE	±0.3mm
DESIGN	Lacy	DATE	20091216
CHECK	Peter Li	DATE	20091216
RELEASE	Victor	DATE	20091216

Version: 2.0  
NO: 1 of 1

深圳市维拓光电技术有限公司  
Victor-touch Technology Co.,LTD.