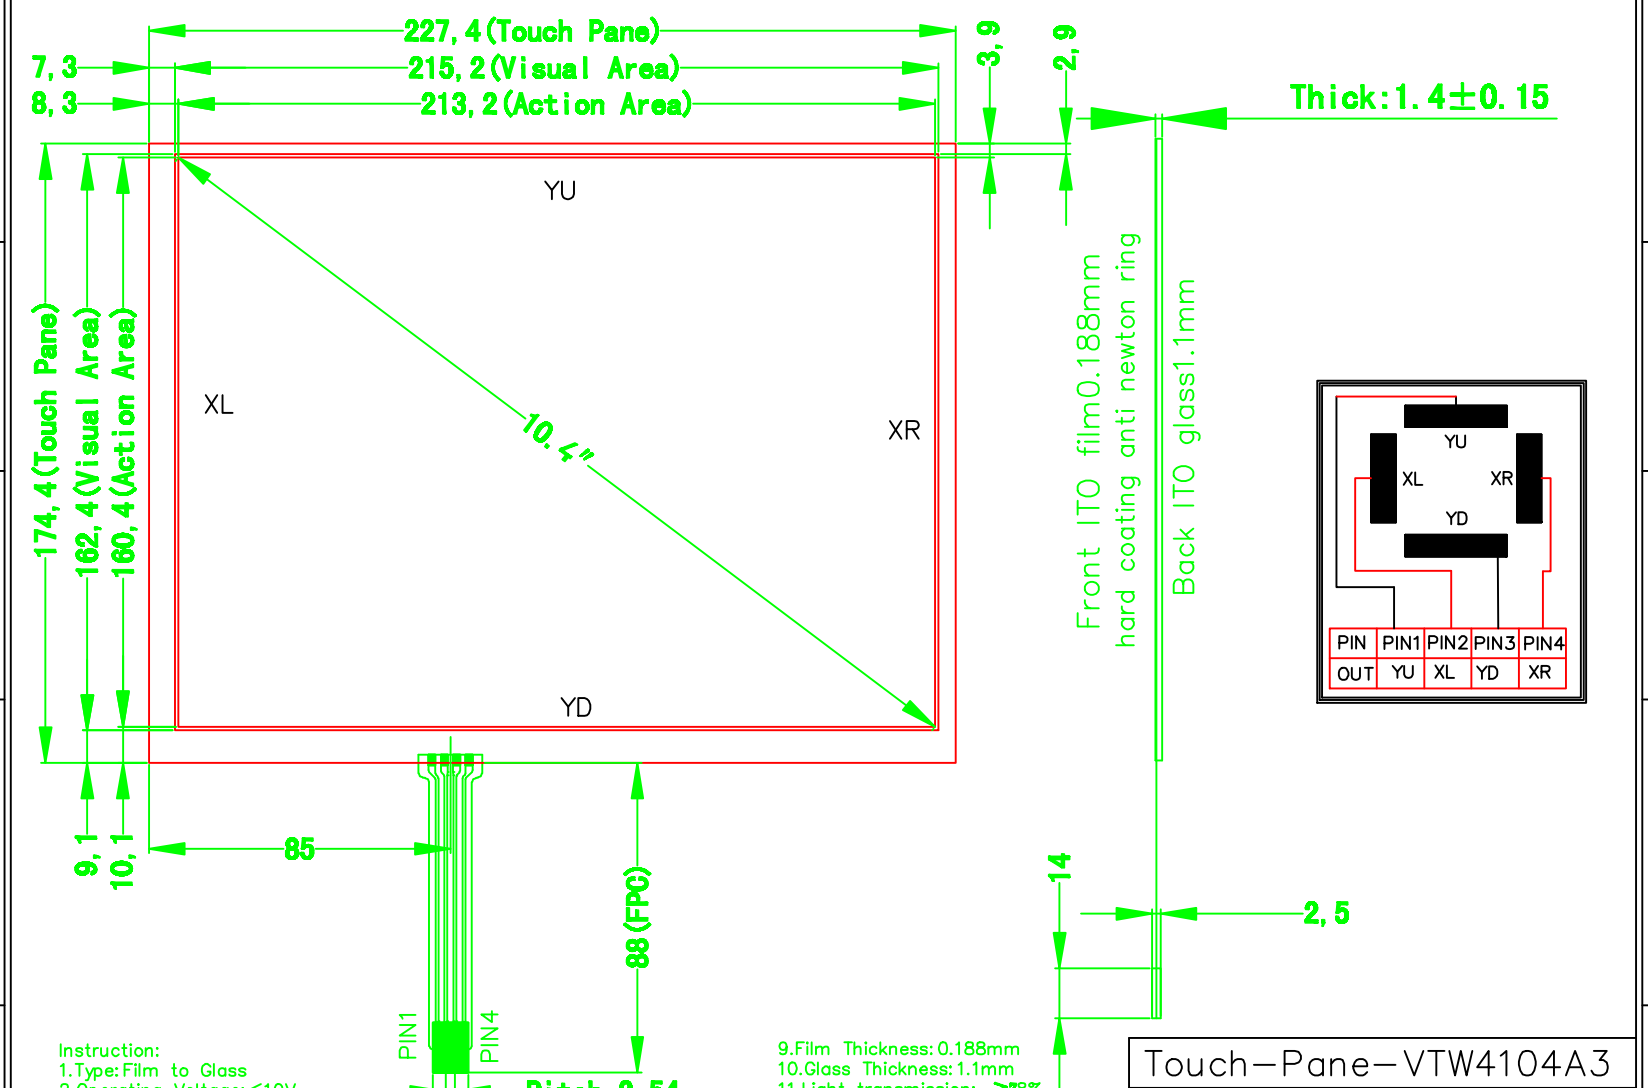

Instruction:
1.Type: Film to Glass
2.Operating Voltage: ≤10V
3.Response Time: ≤10ms
4.Storage Temperature: −20℃~+70℃
5.Operation Temperature/Humidity : −10℃~+60℃/ 20%~95%
6.Hitting Life: >1,000,000 Times ,250gf Force;
7.writting Life>100,000 Times 250gf Force;
8.Connect Material: FPC+PIN
9.Film Thickness: 0.188mm
10.Glass Thickness: 1.1mm
11.Light transmission: ≥78%
12.Force: 100g or more
13.Linearity: ≤1.5%
14.Insulation: ≥20M Ω
15.Resistance: X: 450 Ω~810 Ω;
Y180 Ω~350 Ω.
16.Surface Hardness ≥3H(pencil)

Touch−Pane−VTW4104A3

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	1.0
UNIT	mm	TOLERANCE	±0.3m	NO.	1 of 1
DESIGN	Lucy	DATE	20100510		
CHECK	Peter • Li	DATE	20100510		
RELEASE	Victor	DATE	20100510		

深圳市特拓光技术有限公司
Victor-touch Technlogy Co., LTD.